



## Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)




Figure 1. Figure 2.

### .562 Diameter Spring Clips – Spring Steel

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-09-000	0.562	0.522	0.592	3	1	0.69	0.6	0.4	0.022	0.128	0.188			0.625	0.312	0	1
100-200-09-001	0.562	0.522	0.592	2	1	0.69	0.6	0.4	0.022	0.093	0.188			0.625		0	1
100-200-09-002	0.562	0.522	0.592	2	0.688	0.69	0.6	0.4	0.022	0.128	0.188			0.312		0	1
100-200-09-003	0.562	0.522	0.592	1	0.375	0.69	0.6	0.4	0.022	0.093	0.188					0	1
100-200-09-004	0.562	0.522	0.592	2	0.625	0.69	0.6	0.4	0.022	0.128	0.156	0.3		0.312		1	2
100-200-09-005	0.562	0.522	0.592	2	0.563	0.69	0.6	0.4	0.022	0.128	.156 / .094			0.312		0	1
100-200-09-007	0.562	0.522	0.592	2	0.625	0.68	0.59	0.39	0.016	0.128	0.156	0.3		0.312		1	2
100-200-09-008	0.562	0.522	0.592	3	1	0.68	0.59	0.39	0.016	0.128	0.188			0.625	0.312	0	1
100-200-09-009	0.562	0.522	0.592	3	1	0.69	0.6	0.4	0.022	0.128	0.188	0.31	0.31	0.625	0.312	2	2
100-200-09-010	0.562	0.522	0.592	1	0.281	0.68	0.59	0.39	0.016	0.128	0.141					0	1
100-200-09-011	0.562	0.522	0.592	2	1	0.68	0.58	0.39	0.012	0.128	0.25	0.1	0.13	0.5		6	2
100-200-09-012	0.562	0.522	0.592	3	1	0.69	0.6	0.4	0.022	.128 / .312	0.188			0.625	0.312	0	1
100-200-09-013	0.562	0.522	0.592	3	1	0.68	0.58	0.39	0.012	0.128	0.188	0.31	0.31	0.625	0.312	2	2
100-200-09-014	0.562	0.522	0.592	1	0.375	0.69	0.6	0.4	0.022	0.128	0.188					0	1
100-200-09-015	0.562	0.522	0.592	2	0.563	0.68	0.59	0.39	0.016	0.128	0.125			0.312		0	1
100-200-09-016	0.562	0.522	0.592	3	1	0.68	0.58	0.39	0.012	0.071	0.188			0.625	0.312	0	1
100-200-09-017	0.562	0.522	0.592	3	1	0.68	0.58	0.39	0.012	0.093	0.188			0.625	0.312	0	1
100-200-09-018	0.562	0.522	0.592	1	0.375	0.68	0.58	0.39	0.012	0.128	0.188	0.17				1	2
100-200-09-019	0.562	0.522	0.592	3	0.953	0.68	0.59	0.39	0.016	0.128	0.16			0.625	0.312	0	1
100-200-09-020	0.562	0.522	0.592	2	0.625	0.69	0.6	0.4	0.022	0.128	0.156	0.3		0.312		1	2
100-200-09-021	0.562	0.522	0.592	2	0.625	0.68	0.58	0.39	0.012	0.103	0.156	0.3		0.312		1	2
100-200-09-022	0.562	0.522	0.592	2	0.625	0.69	0.6	0.4	0.022	0.128	0.156	0.14	0.13	0.312		3	2
100-200-09-023	0.562	0.522	0.592	2	1	0.69	0.6	0.4	0.022	0.103	0.188			0.625		0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



## Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

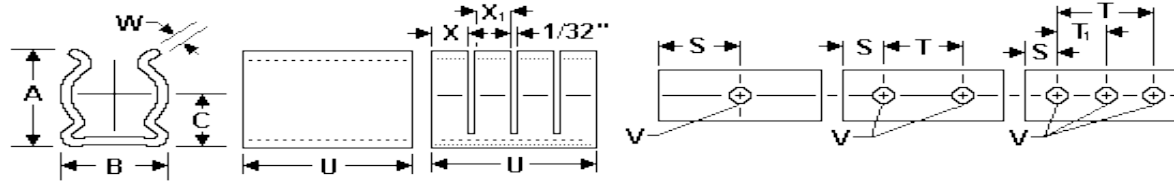


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-09-024	0.562	0.522	0.592	3	1	0.68	0.58	0.39	0.012	0.098	0.188	0.31	0.31	0.625	0.312	2	2
100-200-09-025	0.562	0.522	0.592	2	1	0.69	0.6	0.4	0.022	0.089	0.25			0.5		0	1
100-200-09-026	0.562	0.522	0.592	1	0.375	0.68	0.58	0.39	0.012	0.128	0.188	0.1	0.1			2	2
100-200-09-027	0.562	0.522	0.592	3	1	0.68	0.59	0.39	0.016	0.128	0.2	0.31	0.31	0.6	0.3	2	2
100-200-09-028	0.562	0.522	0.592	3	1.25	0.68	0.58	0.39	0.014	0.128	0.125			1	0.5	0	1
100-200-09-029	0.562	0.522	0.592	3	1.375	0.68	0.58	0.39	0.014	0.128	0.188			1	0.5	0	1
100-200-09-030	0.562	0.522	0.592	2	1	0.68	0.58	0.39	0.012	0.128	0.188			0.625		0	1
100-200-09-031	0.562	0.522	0.592	2	1	0.69	0.6	0.4	0.022	0.128	0.188			0.625		0	1
100-200-09-032	0.562	0.522	0.592	2	0.625	0.68	0.58	0.39	0.012	0.128	0.156	0.3		0.312		1	2
100-200-09-033	0.562	0.522	0.592	3	0.953	0.68	0.58	0.39	0.012	0.128	0.164			0.625	0.312	0	1
100-200-09-034	0.562	0.522	0.592	1	0.375	0.68	0.58	0.39	0.014	0.093	0.188					0	1
100-200-09-035	0.562	0.522	0.592	1	0.75	0.68	0.59	0.39	0.014	0.098	0.375					0	1
100-200-09-036	0.562	0.522	0.592	2	1	0.68	0.59	0.39	0.014	0.115	0.25			0.5		0	1
100-200-09-037	0.562	0.522	0.592	1	0.25	0.68	0.59	0.39	0.016	0.128	0.125					0	1
100-200-09-038	0.562	0.522	0.592	2	1	0.68	0.58	0.39	0.012	0.128	0.188	0.31	0.31	0.625		2	2
100-200-09-039	0.562	0.522	0.592	1	0.375	0.69	0.6	0.4	0.022	0.136	0.188					0	1
100-200-09-040	0.562	0.522	0.592	3	1	0.69	0.6	0.4	0.022	0.149	0.188	0.31	0.31	0.625	0.312	2	2
100-200-09-041	0.562	0.522	0.592	2	0.625	0.68	0.59	0.39	0.014	0.098	0.156	0.3		0.312		1	2
100-200-09-042	0.562	0.522	0.592	2	0.625	0.68	0.59	0.39	0.014	0.128	0.156	0.3		0.312		1	2
100-200-09-043	0.562	0.522	0.592	2	1	0.68	0.59	0.39	0.014	0.093	0.188			0.625		0	1
100-200-09-044	0.562	0.522	0.592	2	1	0.68	0.58	0.39	0.012	0.103	0.175	0.31	0.31	0.65		2	2
100-200-09-045	0.562	0.522	0.592	1	1.125	0.68	0.58	0.39	0.012	0.103	0.188	0.17				1	2
100-200-09-046	0.562	0.522	0.592	3	1.125	0.68	0.59	0.39	0.014	0.093	0.156			0.812	0.406	0	1
100-200-09-082	0.562	0.522	0.592	3	1	0.68	0.58	0.39	0.012	0.128	0.188	0.083	0.083	0.625	0.312	8	2
100-200-09-083	0.562	0.522	0.592	2	0.625	0.68	0.58	0.39	0.014	0.128	0.313			0.312		0	1
100-200-09-084	0.562	0.522	0.592	2	0.875	0.68	0.59	0.39	0.016	0.067	0.25			0.375		0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



## Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

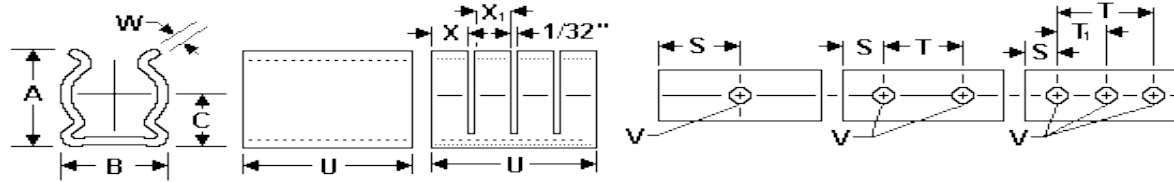


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-09-085	0.562	0.522	0.592	1	0.375	0.69	0.6	0.4	0.022	0.103	0.188					0	1
100-200-09-086	0.562	0.522	0.592	1	0.375	0.69	0.6	0.4	0.022	0.169	0.188					0	1
100-200-09-087	0.562	0.522	0.592	2	0.438	0.69	0.6	0.4	0.02	0.098	0.094			0.25		0	1
100-200-09-088	0.562	0.522	0.592	2	0.875	0.68	0.59	0.39	0.016	0.104	0.25			0.375		0	1
100-200-09-089	0.562	0.522	0.592	2	1	0.68	0.59	0.39	0.014	0.128	0.25			0.5		0	1
100-200-09-090	0.562	0.522	0.592	2	0.688	0.68	0.58	0.39	0.014	0.128	0.188			0.313		0	1
100-200-09-091	0.562	0.522	0.592	1	0.438	0.69	0.6	0.4	0.02	0.128	0.219					0	1
100-200-09-092	0.562	0.522	0.592	2	0.875	0.69	0.6	0.4	0.022	.133 max.	0.281	0.29	.290 / .230	0.312		2	2
100-200-09-093	0.562	0.522	0.592	3	1	0.68	0.58	0.39	0.014	0.07	0.188			0.625	0.312	0	1
100-200-09-094	0.562	0.522	0.592	2	1	0.68	0.59	0.39	0.016	# 6 screw	0.312			0.375		0	1
100-200-09-095	0.562	0.522	0.592	2	1	0.68	0.58	0.39	0.014	0.128	0.188			0.625		0	1
100-200-09-096	0.562	0.522	0.592	3	1.625	0.69	0.6	0.4	0.022	0.128	0.25	0.56	0.44	1.125	0.562	2	2
100-200-09-097	0.562	0.522	0.592	2	1	0.69	0.6	0.4	0.022	0.093	0.187	0.31	0.31	0.625		2	2
100-200-09-098	0.562	0.522	0.592	2	1	0.68	0.58	0.39	0.012	0.128	0.281			0.437		0	1
100-200-09-099	0.562	0.522	0.592	2	1	0.68	0.59	0.39	0.016	0.201	0.188			0.625		0	1
100-200-09-100	0.562	0.522	0.592	2	1	0.69	0.6	0.4	0.022	0.201	0.188			0.625		0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.