



## Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

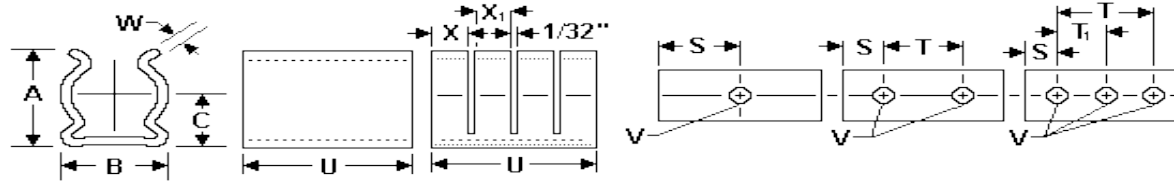


Figure 1. Figure 2.

### .670 Diameter Spring Clips – Spring Steel

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-11-000	0.67	0.62	0.7	3	1.375	0.82	0.72	0.46	0.024	0.128	0.25			0.875	0.437	0	1
100-200-11-001	0.67	0.62	0.7	2	0.938	0.81	0.7	0.45	0.016	0.128	0.25			0.437		0	1
100-200-11-002	0.67	0.62	0.7	1	0.5	0.82	0.72	0.46	0.024	0.312	0.25					0	1
100-200-11-003	0.67	0.62	0.7	1	0.625	0.82	0.72	0.46	0.024	0.177	0.313					0	1
100-200-11-004	0.67	0.62	0.7	2	0.938	0.82	0.72	0.46	0.024	0.128	0.25			0.437		0	1
100-200-11-006	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.128	0.156	0.13	0.13	0.437		4	2
100-200-11-007	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.25			0.875	0.437	0	1
100-200-11-008	0.67	0.62	0.7	2	0.5	0.81	0.7	0.45	0.016	0.128	0.125			0.25		0	1
100-200-11-009	0.67	0.62	0.7	3	1.25	0.81	0.7	0.45	0.016	0.128	.250/.125	.130/.160	0.13	0.875	0.437	7	2
100-200-11-010	0.67	0.62	0.7	1	0.5	0.81	0.7	0.45	0.016	0.136	0.25					0	1
100-200-11-011	0.67	0.62	0.7	2	0.938	0.81	0.7	0.45	0.016	0.128	0.25	.090/.160	0.13	0.437		5	2
100-200-11-012	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.25	.090/.160	0.13	0.875	0.437	8	2
100-200-11-014	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.128	0.156	0.36		0.437		1	2
100-200-11-015	0.67	0.62	0.7	2	1.375	0.82	0.72	0.46	0.024	0.144	0.188			1		0	1
100-200-11-016	0.67	0.62	0.7	3	1.375	0.82	0.72	0.46	0.024	0.128	0.25	0.44	0.44	0.875	0.437	2	2
100-200-11-017	0.67	0.62	0.7	1	0.5	0.82	0.72	0.46	0.024	0.128	0.25					0	1
100-200-11-018	0.67	0.62	0.7	2	0.938	0.82	0.72	0.46	0.024	0.093	0.25			0.437		0	1
100-200-11-019	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.128	0.188			0.375		0	1
100-200-11-020	0.67	0.62	0.7	2	0.875	0.82	0.72	0.46	0.024	0.128	0.219			0.437		0	1
100-200-11-021	0.67	0.62	0.7	3	1.125	0.82	0.72	0.46	0.024	0.128	0.125			0.875	0.437	0	1
100-200-11-022	0.67	0.62	0.7	3	1	0.82	0.72	0.46	0.024	0.13	0.188			0.625	0.312	0	1
100-200-11-023	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.25	0.44	0.44	0.875	0.437	2	2
100-200-11-024	0.67	0.62	0.7	3	1.188	0.81	0.7	0.45	0.016	0.128	0.156			0.875	0.437	0	1
100-200-11-025	0.67	0.62	0.7	2	0.75	0.82	0.72	0.46	0.022	0.128	0.156			0.437		0	1
100-200-11-026	0.67	0.62	0.7	2	1.188	0.81	0.7	0.45	0.014	0.128	0.344	0.1	0.13	0.5		7	2

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



## Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

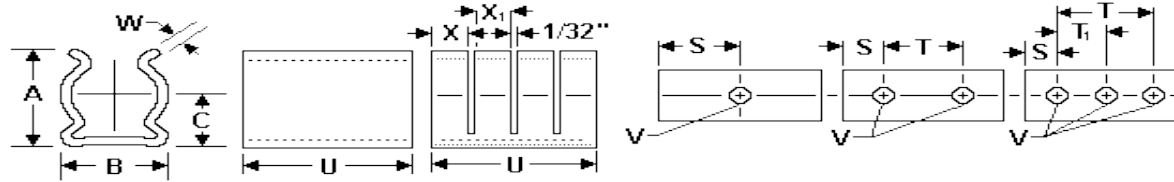


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-11-027	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.103	0.156	0.13	0.13	0.437		4	2
100-200-11-028	0.67	0.62	0.7	3	1.375	0.82	0.72	0.46	0.024	0.103	0.25			0.875	0.437	0	1
100-200-11-029	0.67	0.62	0.7	0	1.875	0.81	0.7	0.45	0.016							0	1
100-200-11-030	0.67	0.62	0.7	2	1.188	0.81	0.7	0.45	0.014	0.128	0.344	0.14	0.14	0.5		6	2
100-200-11-031	0.67	0.62	0.7	1	0.375	0.81	0.7	0.45	0.014	0.128	0.188					0	1
100-200-11-032	0.67	0.62	0.7	3	1.25	0.81	0.7	0.45	0.014	0.098	0.188	0.29	0.29	0.875	0.437	3	2
100-200-11-033	0.67	0.62	0.7	2	1.125	0.81	0.7	0.45	0.016	0.128	0.25			0.625		0	1
100-200-11-034	0.67	0.62	0.7	2	1	0.81	0.7	0.45	0.016	0.128	0.25	0.31	0.31	0.5		2	2
100-200-11-035	0.67	0.62	0.7	2	1.375	0.82	0.72	0.46	0.024	0.193	0.25			0.875		0	1
100-200-11-036	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.188	0.2	0.2	1	0.5	5	2
100-200-11-037	0.67	0.62	0.7	2	0.938	0.82	0.72	0.46	0.024	0.093	0.219			0.5		0	1
100-200-11-038	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.128	0.156			0.437		0	1
100-200-11-039	0.67	0.62	0.7	3	1	0.81	0.7	0.45	0.014	0.07	0.188	0.48		0.625	0.312	1	2
100-200-11-040	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.098	0.156			0.437		0	1
100-200-11-041	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.103	0.25	0.108	0.13	0.875	0.437	8	2
100-200-11-042	0.67	0.62	0.7	1	0.5	0.81	0.7	0.45	0.016	0.093	0.25					0	1
100-200-11-043	0.67	0.62	0.7	3	1.5	0.81	0.7	0.45	0.016	0.128	0.25	0.224	0.224	1	0.5	5	2
100-200-11-044	0.67	0.62	0.7	2	1.31	0.81	0.7	0.45	0.014	0.128	0.156	0.416	0.416	1		2	2
100-200-11-045	0.67	0.62	0.7	2	0.5	0.81	0.7	0.45	0.014	0.128	0.125			0.25		0	1
100-200-11-046	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.103	0.25	0.108	0.13	0.875	0.437	8	2
100-200-11-075	0.67	0.62	0.7	2	1.375	0.82	0.71	0.46	0.02	0.103	0.312			0.75		0	1
100-200-11-076	0.67	0.62	0.7	2	1.875	0.81	0.7	0.45	0.014	0.103	0.237	0.6	0.6	1.4		2	2
100-200-11-077	0.67	0.62	0.7	2	1.125	0.82	0.71	0.46	0.02	0.128	0.188			0.75		0	1
100-200-11-078	0.67	0.62	0.7	1	0.5	0.82	0.72	0.46	0.024	0.093	0.25					0	1
100-200-11-079	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.098	0.156	0.16	0.16	0.437		3	2
100-200-11-080	0.67	0.62	0.7	2	0.5	0.81	0.7	0.45	0.016	0.128	0.125	0.2	0.125	0.25		2	2

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



## Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

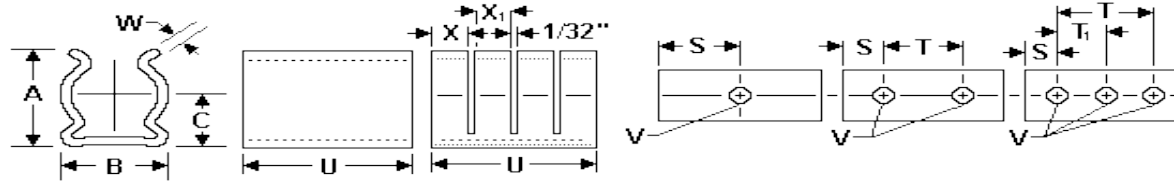


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-11-081	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.014	0.128	0.156	0.16	0.16	0.437		3	2
100-200-11-082	0.67	0.62	0.7	1	0.438	0.82	0.71	0.46	0.02	0.128	0.219					0	1
100-200-11-083	0.67	0.62	0.7	2	1.375	0.81	0.7	0.45	0.014	0.136	0.237	0.43	0.44	0.9		2	2
100-200-11-084	0.67	0.62	0.7	2	1	0.81	0.7	0.45	0.016	0.149	0.25	0.31	0.31	0.5		2	2
100-200-11-085	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.014	0.128	0.156	0.125	0.125	0.437		4	2
100-200-11-086	0.67	0.62	0.7	3	1.5	0.81	0.7	0.45	0.016	0.128	0.25	0.22	0.22	1	0.5	5	2
100-200-11-087	0.67	0.62	0.7	2	0.938	0.81	0.7	0.45	0.016	0.103	0.25	0.29	0.29	0.438		2	2
100-200-11-088	0.67	0.62	0.7	3	1	0.81	0.7	0.45	0.014	0.07	0.188			0.625	0.312	0	1
100-200-11-089	0.67	0.62	0.7	3	1	0.81	0.7	0.45	0.014	0.136	0.188			0.625	0.312	0	1
100-200-11-090	0.67	0.62	0.7	2	1.2	0.82	0.72	0.46	0.028	0.14	0.3			0.6		0	1
100-200-11-091	0.67	0.62	0.7	2	1.6	0.82	0.72	0.46	0.028	0.14	0.4			0.8		0	1
100-200-11-092	0.67	0.62	0.7	2	1.4	0.82	0.72	0.46	0.028	0.14	0.3			0.8		0	1
100-200-11-093	0.67	0.62	0.7	3	1	0.82	0.72	0.46	0.029	0.135	0.188	0.48		0.625	0.312	1	2
100-200-11-094	0.67	0.62	0.7	1	0.375	0.81	0.7	0.45	0.014	0.128	0.187					0	1
100-200-11-095	0.67	0.62	0.7	2	0.75	0.82	0.72	0.46	0.024	0.103	0.188			0.375		0	1
100-200-11-096	0.67	0.62	0.7	2	1	0.81	0.7	0.45	0.014	0.103	0.281	0.46	0.48	0.437		2	2
100-200-11-097	0.67	0.62	0.7	3	1.188	0.81	0.7	0.45	0.014	0.128	0.156			0.875	0.437	0	1
100-200-11-098	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.014	0.128	0.156			0.437		0	1
100-200-11-099	0.67	0.62	0.7	2	1.375	0.81	0.7	0.45	0.014	0.103	0.312			0.75		0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.