



Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

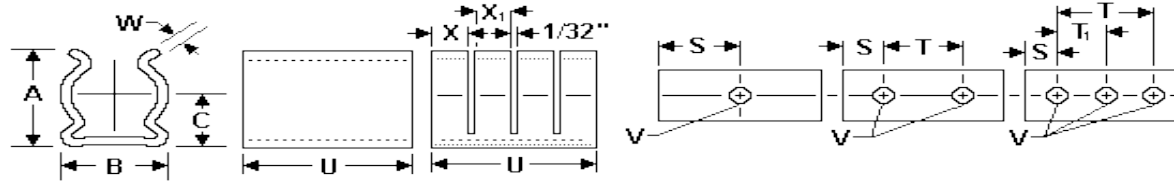


Figure 1. Figure 2.

.750 Diameter Spring Clips – Spring Steel

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-12-000	0.75	0.695	0.805	3	2	0.92	0.81	0.5	0.029	0.144	0.25			1.5	0.75	0	1
100-200-12-001	0.75	0.695	0.805	3	2	0.92	0.81	0.5	0.029	0.128	0.25			1.5	0.75	0	1
100-200-12-002	0.75	0.695	0.805	1	0.625	0.92	0.81	0.5	0.029	0.144	.250 / .375					0	1
100-200-12-003	0.75	0.695	0.805	2	1.25	0.92	0.81	0.5	0.029	0.144	0.25			0.75		0	1
100-200-12-004	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.144	0.25			0.75		0	1
100-200-12-005	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.25			1.5	0.75	0	1
100-200-12-006	0.75	0.695	0.805	2	1.625	0.91	0.78	0.49	0.016	0.144	0.25	0.15	0.13	1.125		9	2
100-200-12-007	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.25	0.5		1.5	0.75	2	2
100-200-12-008	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.144	0.25	0.13	0.13	0.75		7	2
100-200-12-009	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.25	.340/.160	0.13	1.5	0.75	10	2
100-200-12-010	0.75	0.695	0.805	1	0.625	0.92	0.81	0.5	0.025	0.136	.250 / .375					0	1
100-200-12-011	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.128	0.25	0.13	0.13	0.75		7	2
100-200-12-012	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.128	0.25	.340/.160	0.13	1.5	0.75	10	2
100-200-12-013	0.75	0.695	0.805	3	1.625	0.92	0.81	0.5	0.029	0.144	0.25			1.125	0.562	0	1
100-200-12-014	0.75	0.695	0.805	2	0.625	0.91	0.78	0.49	0.016	0.096	0.156			0.312		0	1
100-200-12-015	0.75	0.695	0.805	2	1.25	0.92	0.81	0.5	0.029	0.171	0.25			0.75		0	1
100-200-12-016	0.75	0.695	0.805	1	0.281	0.91	0.78	0.49	0.016	0.128	0.141					0	1
100-200-12-017	0.75	0.695	0.805	3	2	0.92	0.81	0.5	0.029	0.144	0.25	0.65	0.65	1.5	0.75	2	2
100-200-12-018	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.128	0.25			1.5	0.75	0	1
100-200-12-019	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.128	0.25			0.75		0	1
100-200-12-020	0.75	0.695	0.805	3	2	0.92	0.81	0.5	0.029	0.093	0.25			1.5	0.75	0	1
100-200-12-021	0.75	0.695	0.805	2	0.875	0.91	0.8	0.49	0.022	0.144	0.25			0.375		0	1
100-200-12-022	0.75	0.695	0.805	2	1	0.92	0.81	0.5	0.029	0.156	0.188			0.625		0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

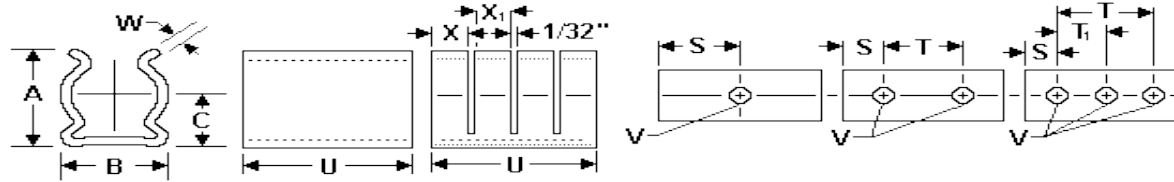


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-12-023	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.128	0.25	0.47	0.47	1.5	0.75	3	2
100-200-12-024	0.75	0.695	0.805	3	2	0.92	0.81	0.5	0.029	0.156	0.25	0.63	0.63	1.5	0.75	2	2
100-200-12-025	0.75	0.695	0.805	2	0.75	0.91	0.79	0.49	0.02	0.128	0.188			0.375		0	1
100-200-12-026	0.75	0.695	0.805	2	0.625	0.91	0.78	0.49	0.016	0.096	0.156			0.312		0	1
100-200-12-027	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.25	0.65	0.65	1.5	0.75	2	2
100-200-12-028	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.144	0.25	0.4	0.4	0.75		2	2
100-200-12-029	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.103	0.25	0.13	0.13	0.75		7	2
100-200-12-030	0.75	0.695	0.805	2	0.75	0.92	0.82	0.5	0.032	0.144	0.219			0.312		0	1
100-200-12-031	0.75	0.695	0.805	2	1	0.92	0.81	0.5	0.029	0.144	0.188			0.625		0	1
100-200-12-032	0.75	0.695	0.805	3	1.25	0.91	0.78	0.49	0.016	0.098	0.188	0.29	0.29	0.875	0.437	3	2
100-200-12-033	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.3	0.26	0.26	1.4	0.7	6	2
100-200-12-034	0.75	0.695	0.805	3	1.625	0.91	0.78	0.49	0.016	0.144	0.25			1.125	0.562	0	1
100-200-12-035	0.75	0.695	0.805	2	1.25	0.91	0.79	0.49	0.02	0.144	0.25			0.75		0	1
100-200-12-036	0.75	0.695	0.805	1	0.625	0.91	0.78	0.49	0.016	0.144	.250 / .375					0	1
100-200-12-037	0.75	0.695	0.805	1	0.625	0.91	0.78	0.49	0.016	0.103	.250 / .375	0.18	0.18			2	2
100-200-12-038	0.75	0.695	0.805	2	1.25	0.92	0.81	0.5	0.029	0.15	0.25			0.75		0	1
100-200-12-039	0.75	0.695	0.805	2	1.5	0.91	0.78	0.49	0.016	0.144	0.375	0.47	0.46	0.75		2	2
100-200-12-040	0.75	0.695	0.805	3	1.063	0.91	0.78	0.49	0.016	0.128	0.219			1.25	0.625	0	1
100-200-12-041	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.128	0.125	0.225	0.225	1		4	2
100-200-12-042	0.75	0.695	0.805	2	1	0.92	0.81	0.5	0.029	0.156	0.188	0.14	0.141	0.625		5	2
100-200-12-043	0.75	0.695	0.805	1	0.75	0.92	0.81	0.5	0.014	0.098	0.375					0	1
100-200-12-044	0.75	0.695	0.805	1	0.625	0.92	0.81	0.5	0.025	0.093	.250 / .375					0	1
100-200-12-045	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.102	0.25			0.75		0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

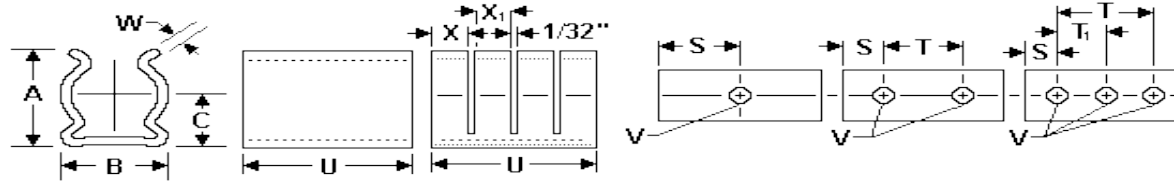


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-12-046	0.75	0.695	0.805	1	0.625	0.92	0.81	0.5	0.025	0.093	0.313					0	1
100-200-12-047	0.75	0.695	0.805	3	1.25	0.91	0.78	0.49	0.016	0.098	0.187	0.29	0.29	0.875	0.437	2	2
100-200-12-062	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.098	0.25	0.22	0.22	0.75		4	2
100-200-12-063	0.75	0.695	0.805	3	2.25	0.91	0.78	0.49	0.016	0.128	0.375			1.5	0.75	2	2
100-200-12-064	0.75	0.695	0.805	2	0.75	0.91	0.79	0.49	0.02	0.133	0.188			0.375		0	1
100-200-12-065	0.75	0.695	0.805	3	1.875	0.91	0.78	0.49	0.016	0.144	0.258	0.44	0.44	1.5	0.75	2	2
100-200-12-066	0.75	0.695	0.805	1	0.625	0.92	0.81	0.5	0.028	0.25	0.313					0	1
100-200-12-067	0.75	0.695	0.805	1	1	0.92	0.81	0.5	0.028	0.25	0.5					0	1
100-200-12-068	0.75	0.695	0.805	1	0.438	0.91	0.79	0.49	0.02	0.175	0.219					0	1
100-200-12-069	0.75	0.695	0.805	2	1.5	0.91	0.78	0.49	0.016	0.136	0.375	0.48		0.75		1	2
100-200-12-070	0.75	0.695	0.805	2	1.875	0.92	0.81	0.5	0.014	0.103	0.237	0.6		1.4		1	2
100-200-12-072	0.75	0.695	0.805	2	1	0.91	0.8	0.49	0.022	0.128	0.188			0.625		0	1
100-200-12-073	0.75	0.695	0.805	2	1	0.91	0.78	0.49	0.016	0.156	0.188	0.13	0.13	0.625		5	2
100-200-12-074	0.75	0.695	0.805	1	0.438	0.91	0.79	0.49	0.02	0.196	0.219					0	1
100-200-12-075	0.75	0.695	0.805	1	0.625	0.91	0.79	0.49	0.02	0.131	0.313					0	1
100-200-12-076	0.75	0.695	0.805	1	0.438	0.91	0.79	0.49	0.02	0.128	0.219					0	1
100-200-12-077	0.75	0.695	0.805	2	1.5	0.91	0.78	0.49	0.016	0.136	0.375	0.48	0.48	0.75		2	2
100-200-12-078	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.136	0.25	0.4	0.39	0.75		2	2
100-200-12-079	0.75	0.695	0.805	2	2	0.91	0.78	0.49	0.016	0.136	0.25	0.64	0.65	1.5		2	2
100-200-12-080	0.75	0.695	0.805	1	0.5	0.92	0.82	0.5	0.032	0.143	0.25					0	1
100-200-12-081	0.75	0.695	0.805	2	0.938	0.91	0.78	0.49	0.016	0.128	0.25			0.437		0	1
100-200-12-082	0.75	0.695	0.805	2	1	0.91	0.78	0.49	0.016	0.128	0.188	0.31	0.31	0.625		2	2
100-200-12-083	0.75	0.695	0.805	2	1.5	0.92	0.81	0.5	0.029	0.144	0.375			0.75		0	1
100-200-12-084	0.75	0.695	0.805	2	0.75	0.91	0.79	0.49	0.02	0.128	0.188	0.22	0.22	0.375		2	2
100-200-12-085	0.75	0.695	0.805	2	1.2	0.92	0.81	0.5	0.029	0.14	0.3			0.6		0	1
100-200-12-086	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.128	0.25	0.4	0.4	0.75		2	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

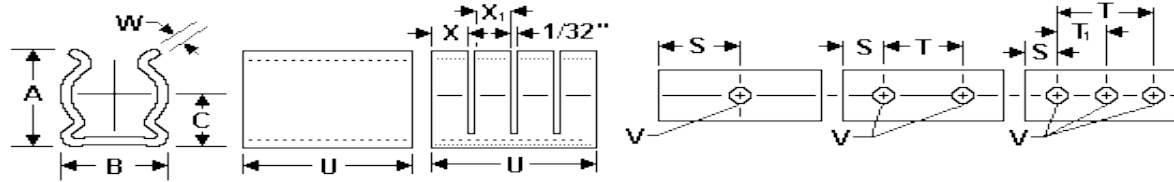


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-12-087	0.75	0.695	0.805	3	1.875	0.92	0.81	0.5	0.028	0.128	0.238	0.52	0.52	1.4	0.7	2	2
100-200-12-088	0.75	0.695	0.805	1	0.63	0.91	0.78	0.49	0.016	0.144	0.313					0	1
100-200-12-089	0.75	0.695	0.805	2	1.625	0.91	0.78	0.49	0.016	0.144	0.438			0.75		0	1
100-200-12-090	0.75	0.695	0.805	1	0.375	0.92	0.81	0.5	0.016	0.128	0.188					0	1
100-200-12-091	0.75	0.695	0.805	3	2	0.92	0.81	0.5	0.028	0.14	0.3			1.4	0.7	0	1
100-200-12-092	0.75	0.695	0.805	2	1	0.92	0.81	0.5	0.028	0.14	0.2			0.6		0	1
100-200-12-093	0.75	0.695	0.805	2	1	0.91	0.78	0.49	0.016	0.144	0.25			0.5		0	1
100-200-12-094	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.103	0.25	0.65	0.65	1.5	0.75	2	2
100-200-12-095	0.75	0.695	0.805	2	1	0.91	0.78	0.49	0.016	0.156	0.188			0.625		0	1
100-200-12-096	0.75	0.695	0.805	2	1.5	0.91	0.78	0.49	0.016	0.144	0.375			0.75		0	1
100-200-12-097	0.75	0.695	0.805	2	1	0.91	0.78	0.49	0.016	0.144	0.25	0.48		0.5		1	2
100-200-12-098	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.128	0.25	0.22	0.22	0.75		4	2
100-200-12-099	0.75	0.695	0.805	1	0.625	0.92	0.81	0.5	0.012	0.173	0.313					0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.