



Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

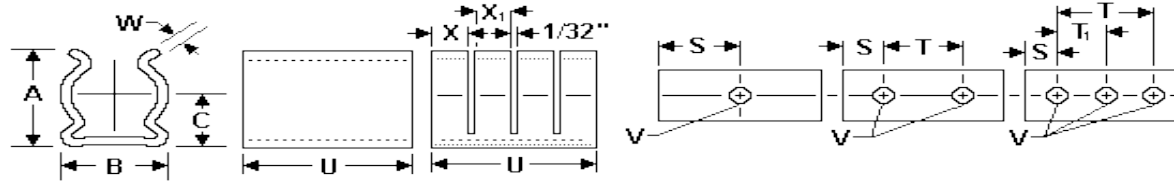


Figure 1. Figure 2.

.400 Diameter Spring Clips – Spring Steel

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-16-000	0.4	0.37	0.42	3	1.188	0.49	0.42	0.27	0.012	0.093	0.188	0.38	0.38	0.813	0.406	2	2
100-200-16-001	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.093	0.188	0.38		0.406		1	2
100-200-16-002	0.4	0.37	0.42	2	0.875	0.49	0.42	0.27	0.012	0.093	0.188			0.5		0	1
100-200-16-003	0.4	0.37	0.42	2	0.875	0.49	0.42	0.27	0.012	0.093	0.188	0.22	0.38	0.5		2	2
100-200-16-004	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.093	0.094			0.813	0.406	0	1
100-200-16-005	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.093	0.094	0.28	0.38	0.813	0.406	2	2
100-200-16-006	0.4	0.37	0.42	3	1.125	0.49	0.42	0.27	0.012	0.093	0.156	0.34	0.38	0.813	0.406	2	2
100-200-16-007	0.4	0.37	0.42	3	1.188	0.49	0.42	0.27	0.012	0.103	0.188	0.38	0.38	0.813	0.406	2	2
100-200-16-008	0.4	0.37	0.42	1	0.375	0.49	0.42	0.27	0.012	0.098	0.188					0	1
100-200-16-009	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.115	0.203	0.13	0.13	0.375		4	2
100-200-16-010	0.4	0.37	0.42	2	0.953	0.49	0.42	0.27	0.012	0.115	0.226	0.14	0.13	0.5		5	2
100-200-16-011	0.4	0.37	0.42	2	0.953	0.49	0.42	0.27	0.012	0.078	0.188			0.578		0	1
100-200-16-012	0.4	0.37	0.42	2	1.125	0.49	0.42	0.27	0.012	0.067	0.281	0.34	0.38	0.562		2	2
100-200-16-013	0.4	0.37	0.42	2	0.75	0.49	0.42	0.27	0.012	0.067	0.094	0.23	0.23	0.562		2	2
100-200-16-014	0.4	0.37	0.42	2	0.875	0.49	0.42	0.27	0.012	0.093	0.188	0.22	0.38	0.312		2	2
100-200-16-015	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.098	0.188	0.38		0.406		1	2
100-200-16-016	0.4	0.37	0.42	2	0.625	0.49	0.42	0.27	0.012	0.103	0.156			0.312		0	1
100-200-16-017	0.4	0.37	0.42	2	0.953	0.49	0.42	0.27	0.012	0.093	0.188			0.578		0	1
100-200-16-018	0.4	0.37	0.42	2	0.875	0.49	0.42	0.27	0.012	0.098	0.188	0.22	0.38	0.5		2	2
100-200-16-019	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.103	0.172	0.38		0.438		1	2
100-200-16-020	0.4	0.37	0.42	2	0.953	0.49	0.42	0.27	0.012	0.128	0.226	0.14	0.13	0.5		5	2
100-200-16-021	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.103	0.094	0.31	0.31	0.813	0.406	2	2
100-200-16-022	0.4	0.37	0.42	2	0.625	0.49	0.42	0.27	0.012	0.093	0.156			0.312		0	1
100-200-16-023	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.098	0.188	0.24	0.24	0.406		2	2
100-200-16-024	0.4	0.37	0.42	2	0.75	0.49	0.42	0.27	0.012	0.103	0.219	0.36		0.312		1	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

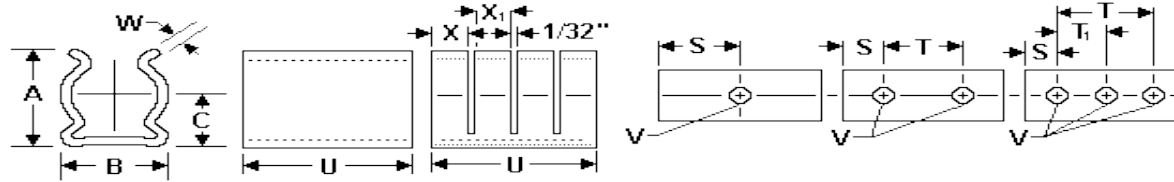


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-16-025	0.4	0.37	0.42	2	0.375	0.49	0.42	0.27	0.012	0.093	0.094			0.187		0	1
100-200-16-026	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.105	0.188	0.38		0.406		1	2
100-200-16-027	0.4	0.37	0.42	1	0.375	0.49	0.42	0.27	0.012	0.128	0.188					0	1
100-200-16-028	0.4	0.37	0.42	1	0.375	0.49	0.42	0.27	0.012	0.093	0.188					0	1
100-200-16-029	0.4	0.37	0.42	3	1.188	0.49	0.42	0.27	0.012	0.103	0.188			0.812	0.406	0	1
100-200-16-030	0.4	0.37	0.42	2	0.781	0.49	0.42	0.27	0.012	0.103	0.188			0.406		0	1
100-200-16-031	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.093	0.125			0.75	0.375	0	1
100-200-16-032	0.4	0.37	0.42	2	1.188	0.49	0.42	0.27	0.012	0.093	0.188	0.38	0.38	0.812		2	2
100-200-16-033	0.4	0.37	0.42	3	2	0.49	0.42	0.27	0.012	0.093	0.3	0.64	0.64	1.4	0.7	2	2
100-200-16-034	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.093	0.188			0.625	0.312	0	1
100-200-16-035	0.4	0.37	0.42	1	0.5	0.49	0.42	0.27	0.012	0.128	0.25					0	1
100-200-16-036	0.4	0.37	0.42	0	1	0.49	0.42	0.27	0.012							0	1
100-200-16-037	0.4	0.37	0.42	1	0.438	0.49	0.42	0.27	0.02	0.128	0.219					0	1
100-200-16-038	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.103	0.094			0.812	0.406	0	1
100-200-16-039	0.4	0.37	0.42	2	0.625	0.49	0.42	0.27	0.012	0.136	0.156			0.312		0	1
100-200-16-040	0.4	0.37	0.42	3	2	0.49	0.42	0.27	0.012	0.103	0.3	0.64	0.64	1.4	0.7	2	2
100-200-16-041	0.4	0.37	0.42	1	0.375	0.49	0.42	0.27	0.02	0.098	0.188					0	1
100-200-16-042	0.4	0.37	0.42	2	0.75	0.49	0.42	0.27	0.012	0.093	0.094	0.23	0.23	0.562		2	2
100-200-16-043	0.4	0.37	0.42	1	0.25	0.49	0.42	0.27	0.012	0.093	0.125					0	1
100-200-16-044	0.4	0.37	0.42	2	0.625	0.49	0.42	0.27	0.012	0.128	0.156			0.312		0	1
100-200-16-045	0.4	0.37	0.42	1	0.438	0.49	0.42	0.27	0.02	0.156	0.218					0	1
100-200-16-094	0.4	0.37	0.42	2	0.625	0.49	0.42	0.27	0.012	0.093	0.156	0.3		0.312		1	2
100-200-16-095	0.4	0.37	0.42	2	0.625	0.49	0.42	0.27	0.012	0.103	0.156	0.3		0.312		1	2
100-200-16-096	0.4	0.37	0.42	2	0.953	0.49	0.42	0.27	0.012	0.078	0.188			0.578		0	1
100-200-16-097	0.4	0.37	0.42	3	1	0.49	0.42	0.27	0.012	0.128	0.188	0.31	0.31	0.625	0.312	2	2
100-200-16-098	0.4	0.37	0.42	3	1.188	0.49	0.42	0.27	0.012	0.093	0.188			0.812	0.406	0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.




Spring Clips

Material: Spring Steel - ASTM-A684

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

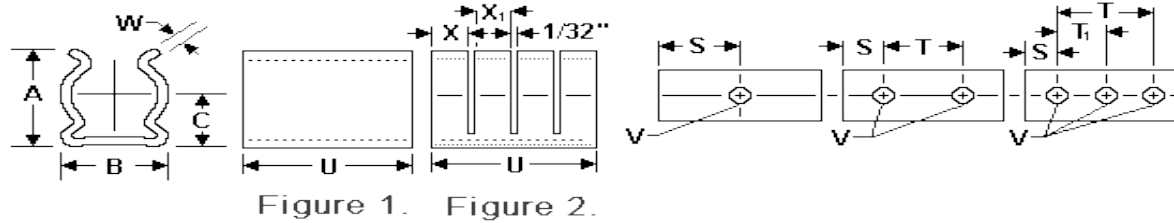

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-200-16-099	0.4	0.37	0.42	3	1.125	0.49	0.42	0.27	0.012	0.093	0.156			0.812	0.406	0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.