



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf




Figure 1. Figure 2.

.400 Diameter Spring Clips - Beryllium Copper

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-08-000	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.016	0.103	0.188			0.75	0.375	0	1
100-300-08-001	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.016	0.093	0.188			0.75	0.375	0	1
100-300-08-002	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.016	0.103	0.188	0.34	0.38	0.75	0.375	2	2
100-300-08-003	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.016	0.093	0.16	0.34	0.38	0.8	0.4	2	2
100-300-08-004	0.4	0.37	0.42	3	2	0.49	0.44	0.28	0.016	0.093	0.3	0.26	0.26	1.4	0.7	6	2
100-300-08-005	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.016	0.103	0.25			0.75	0.375	0	1
100-300-08-006	0.4	0.37	0.42	3	1.188	0.49	0.44	0.28	0.01	0.103	0.188			0.812	0.406	0	1
100-300-08-007	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.012	0.093	0.156	0.34	0.38	0.813	0.406	2	2
100-300-08-008	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.02	0.103	0.188			0.75	0.375	0	1
100-300-08-009	0.4	0.37	0.42	3	2	0.49	0.44	0.28	0.012	0.093	0.3			1.4	0.7	0	1
100-300-08-010	0.4	0.37	0.42	3	1.188	0.49	0.44	0.28	0.016	0.103	0.188			0.812	0.406	0	1
100-300-08-011	0.4	0.37	0.42	3	1.5	0.49	0.44	0.28	0.016	0.128	0.188			1.125	0.562	0	1
100-300-08-012	0.4	0.37	0.42	3	1.5	0.49	0.44	0.28	0.01	0.103	0.25			1	0.5	0	1
100-300-08-013	0.4	0.37	0.42	3	1	0.49	0.44	0.28	0.012	0.103	0.094			0.812	0.406	0	1
100-300-08-014	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.01	0.093	0.187			0.75	0.375	0	1
100-300-08-015	0.4	0.37	0.42	2	0.75	0.49	0.44	0.28	0.018	0.103	0.188			0.375		0	1
100-300-08-016	0.4	0.37	0.42	2	0.75	0.49	0.44	0.28	0.018	0.093	0.188			0.375		0	1
100-300-08-017	0.4	0.37	0.42	2	0.563	0.49	0.44	0.28	0.018	0.099	0.094			0.375		0	1
100-300-08-018	0.4	0.37	0.42	2	1.375	0.49	0.44	0.28	0.012	0.098	0.188	0.115	0.115	1		8	2
100-300-08-019	0.4	0.37	0.42	3	2	0.49	0.44	0.28	0.016	0.104	0.3	0.26	0.26	1.4	0.7	6	2
100-300-08-091	0.4	0.37	0.42	2	1	0.49	0.44	0.28	0.012	0.093	0.187			0.312	0.621	0	1
100-300-08-092	0.4	0.37	0.42	3	2	0.49	0.44	0.28	0.012	0.093	0.3			1.4	0.7	2	2
100-300-08-093	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.012	0.103	0.187			0.75	0.375	0	1
100-300-08-094	0.4	0.37	0.42	2	0.781	0.49	0.44	0.28	0.01	0.103				0.406		0	1
100-300-08-095	0.4	0.37	0.42	2	0.953	0.49	0.44	0.28	0.01	0.078				0.578		0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

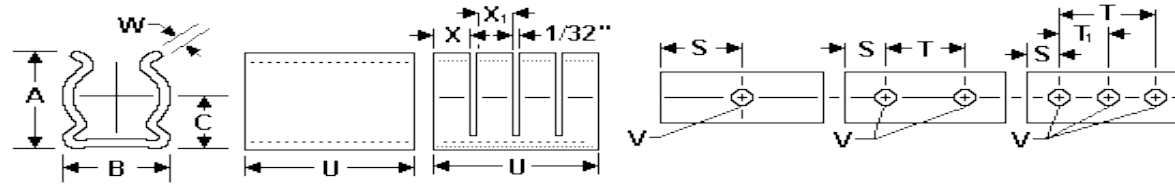


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-08-096	0.4	0.37	0.42	2	1.125	0.49	0.44	0.28	0.01	0.067	0.281	0.36	0.38	0.562		2	2
100-300-08-097	0.4	0.37	0.42	3	1.125	0.49	0.44	0.28	0.01	0.093				0.812	0.406	2	2
100-300-08-098	0.4	0.37	0.42	3	1	0.49	0.44	0.28	0.01	0.093	0.093			0.812	0.406	2	2
100-300-08-099	0.4	0.37	0.42	3	1.188	0.49	0.44	0.28	0.01	0.103				0.812	0.406	2	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.