



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

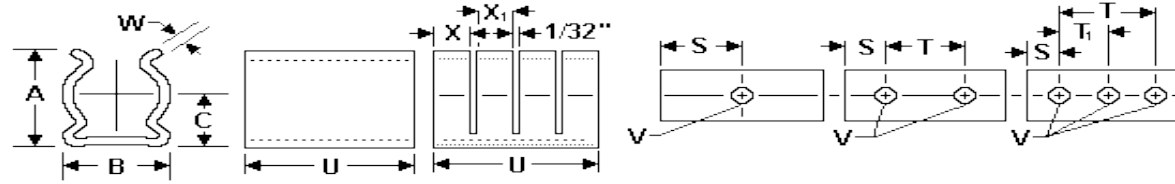


Figure 1. Figure 2.

.670 Diameter Spring Clips - Beryllium Copper

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-11-000	0.67	0.62	0.7	3	1.375	0.8	0.71	0.46	0.024	0.128	0.25			0.875	0.437	0	1
100-300-11-001	0.67	0.62	0.7	2	0.938	0.8	0.71	0.46	0.024	0.128	0.25			0.437		0	1
100-300-11-002	0.67	0.62	0.7	2	0.5	0.8	0.71	0.46	0.024	0.128	0.125			0.25		0	1
100-300-11-003	0.67	0.62	0.7	1	0.5	0.8	0.71	0.46	0.024	0.128	0.25					0	1
100-300-11-004	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.128	.188/.125	0.13	0.13	0.437		4	2
100-300-11-005	0.67	0.62	0.7	2	0.938	0.81	0.7	0.45	0.016	0.128	0.25	0.13	0.13	0.437		5	2
100-300-11-006	0.67	0.62	0.7	3	1.25	0.81	0.7	0.45	0.016	0.128	.250/.125	.130/.160	0.13	0.875	0.437	7	2
100-300-11-007	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.25	.090/.160	0.13	0.875	0.437	8	2
100-300-11-008	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.25			0.875	0.437	0	1
100-300-11-009	0.67	0.62	0.7	2	0.938	0.81	0.7	0.45	0.016	0.128	0.25			0.437		0	1
100-300-11-010	0.67	0.62	0.7	2	0.75	0.81	0.7	0.45	0.016	0.128	0.156	0.36		0.437		1	2
100-300-11-011	0.67	0.62	0.7	3	1.188	0.81	0.7	0.45	0.016	0.128	0.156			0.875	0.437	0	1
100-300-11-012	0.67	0.62	0.7	2	1	0.8	0.71	0.46	0.016	0.144	0.25			0.5		0	1
100-300-11-013	0.67	0.62	0.7	3	1.375	0.81	0.7	0.45	0.016	0.128	0.188	0.2	0.2	1	0.5	5	2
100-300-11-014	0.67	0.62	0.7	1	0.5	0.8	0.71	0.46	0.016	0.312	0.25					0	1
100-300-11-015	0.67	0.62	0.7	2	1.063	0.81	0.7	0.45	0.016	0.128	0.313			0.437		0	1
100-300-11-016	0.67	0.62	0.7	2	1	0.8	0.71	0.46	0.016	0.07	0.188			0.625	0.312	0	1
100-300-11-017	0.67	0.62	0.7	1	0.625	0.81	0.7	0.45	0.016	0.144	0.313					0	1
100-300-11-018	0.67	0.62	0.7	2	1.375	0.82	0.71	0.46	0.02	0.104	0.313			0.75		0	1
100-300-11-019	0.67	0.62	0.7	2	1.375	0.8	0.72	0.46	0.01	0.062	0.438	0.44	0.43	0.5		2	2
100-300-11-020	0.67	0.62	0.7	1	0.5	0.8	0.71	0.46	0.016	0.128	0.25					0	1
100-300-11-021	0.67	0.62	0.7	2	0.75	0.8	0.71	0.46	0.014	0.128	0.156			0.437		0	1
100-300-11-022	0.67	0.62	0.7	3	1.375	0.8	0.71	0.46	0.02	0.128	0.344			0.688	0.344	0	1
100-300-11-023	0.67	0.62	0.7	2	0.938	0.8	0.71	0.46	0.016	0.103	0.25	0.29	0.29	0.437		2	2
100-300-11-024	0.67	0.62	0.7	2	1	0.8	0.71	0.46	0.016	0.093	0.281	0.31	0.31	0.437		2	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

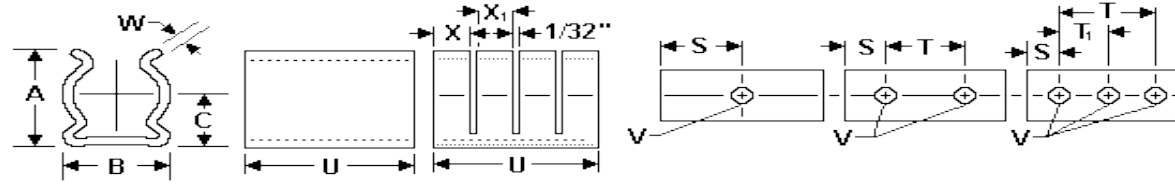


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-11-025	0.67	0.62	0.7	2	1.625	0.8	0.71	0.46	0.016	0.128	0.188			1.25		0	1
100-300-11-026	0.67	0.62	0.7	3	2	0.8	0.71	0.46	0.016	0.128	0.25			1.5	0.75	0	1
100-300-11-027	0.67	0.62	0.7	1	0.375	0.8	0.71	0.46	0.014	0.136	0.187					0	1
100-300-11-028	0.67	0.62	0.7	2	1.125	0.8	0.71	0.46	0.02	0.128	0.188			0.75		0	1
100-300-11-029	0.67	0.62	0.7	3	1.75	0.8	0.71	0.46	0.016	0.128	0.25			1.25	0.625	0	1
100-300-11-030	0.67	0.62	0.7	2	0.75	0.8	0.71	0.46	0.014	0.098	0.156	0.165	0.165	0.437		3	2
100-300-11-087	0.67	0.62	0.7	1	0.625	0.8	0.71	0.46	0.014	0.177	0.313					0	1
100-300-11-088	0.67	0.62	0.7	2	1.375	0.8	0.71	0.46	0.02	0.062	0.437	0.44	0.43	0.5		2	2
100-300-11-089	0.67	0.62	0.7	3	1.188	0.8	0.71	0.46	0.025	0.128	0.156			0.875	0.437	0	1
100-300-11-090	0.67	0.62	0.7	3	1.188	0.8	0.71	0.46	0.014	0.128	0.156			0.875	0.437	0	1
100-300-11-091	0.67	0.62	0.7	3	1.875	0.8	0.71	0.46	0.014	0.093				1.4	0.7	2	2
100-300-11-092	0.67	0.62	0.7	3	1.375	0.8	0.71	0.46	0.014	0.128				0.875	0.437	2	2
100-300-11-093	0.67	0.62	0.7	2	1	0.8	0.71	0.46	0.014	0.128	0.25			0.5		2	2
100-300-11-094	0.67	0.62	0.7	1	0.375	0.8	0.71	0.46	0.014	0.128	0.187					0	1
100-300-11-095	0.67	0.62	0.7	3	1	0.8	0.71	0.46	0.014	0.07	0.187			0.625	0.312	1	2
100-300-11-096	0.67	0.62	0.7	3	1.375	0.8	0.71	0.46	0.024	0.128	0.25	0.44	0.44	0.875	0.437	2	2
100-300-11-097	0.67	0.62	0.7	2	0.938	0.8	0.71	0.46	0.016	0.128	0.25			0.437		0	1
100-300-11-098	0.67	0.62	0.7	2	0.75	0.8	0.71	0.46	0.016	0.128	0.187			0.375		0	1
100-300-11-099	0.67	0.62	0.7	2	0.5	0.8	0.71	0.46	0.016	0.128	0.125			0.25		0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.