



## Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

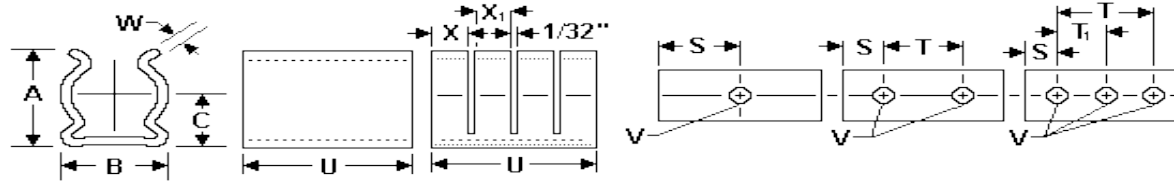


Figure 1. Figure 2.

### .750 Diameter Spring Clips - Beryllium Copper

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-12-000	0.75	0.695	0.805	3	2	0.91	0.81	0.49	0.028	0.144	0.25			1.555	0.75	0	1
100-300-12-001	0.75	0.695	0.805	3	2	0.91	0.81	0.49	0.028	0.128	0.25			1.5	0.75	0	1
100-300-12-002	0.75	0.695	0.805	1	0.625	0.91	0.81	0.49	0.028	0.144	.250/.375					0	1
100-300-12-003	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.028	0.144	0.25			0.75		0	1
100-300-12-004	0.75	0.695	0.805	2	1.25	0.91	0.78	0.47	0.016	0.128	0.25	0.13	0.13	0.75		7	2
100-300-12-005	0.75	0.695	0.805	3	1.625	0.91	0.81	0.49	0.016	0.128	0.25	.190/.160	0.13	1.125	.750/.375	9	2
100-300-12-006	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.128	0.25	.340/.160	0.13	1.5	0.75	10	2
100-300-12-007	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.25			1.5	0.75	0	1
100-300-12-008	0.75	0.695	0.805	2	1.25	0.91	0.78	0.49	0.016	0.144	0.25			0.75		0	1
100-300-12-009	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.144	0.3	0.26	0.26	1.4	0.7	6	2
100-300-12-010	0.75	0.695	0.805	2	1	0.78	0.81	0.49	0.016	0.144	0.25	0.48		0.5		1	2
100-300-12-011	0.75	0.695	0.805	3	2	0.91	0.78	0.49	0.016	0.128	0.25			1.5	0.75	0	1
100-300-12-012	0.75	0.695	0.805	1	0.625	0.91	0.78	0.49	0.016	0.144	0.313					0	1
100-300-12-013	0.75	0.695	0.805	2	1.375	0.91	0.79	0.49	0.02	0.104	0.313			0.75		0	1
100-300-12-014	0.75	0.695	0.805	1	0.625	0.91	0.81	0.49	0.016	0.128	0.313					0	1
100-300-12-015	0.75	0.695	0.805	3	1.625	0.91	0.81	0.49	0.016	0.144	0.344			0.937	0.468	0	1
100-300-12-016	0.75	0.695	0.805	3	2	0.91	0.81	0.49	0.028	0.144	0.25	0.64	0.64	1.5	0.75	0	1
100-300-12-017	0.75	0.695	0.805	2	0.75	0.91	0.81	0.49	0.016	0.128	0.187			0.375		0	1
100-300-12-018	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.103	0.25	0.13	0.13	0.75		7	2
100-300-12-019	0.75	0.695	0.805	2	1.5	0.91	0.81	0.49	0.016	0.144	0.375	0.48	0.48	0.75		2	2
100-300-12-020	0.75	0.695	0.805	2	1.625	0.91	0.81	0.49	0.016	0.128	0.25			1.125		0	1
100-300-12-021	0.75	0.695	0.805	2	1.875	0.91	0.81	0.49	0.016	0.144	0.188	0.6	0.6	1.5		2	2
100-300-12-022	0.75	0.695	0.805	3	1.625	0.91	0.81	0.49	0.016	0.128	0.25			1.12	0.562	0	1
100-300-12-023	0.75	0.695	0.805	2	0.875	0.91	0.81	0.49	0.016	0.144	0.25			0.38		0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



## Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

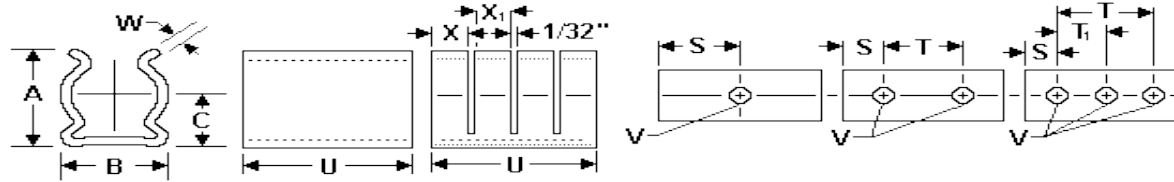


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-12-024	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.144	0.25	0.4	0.4	0.75		2	2
100-300-12-025	0.75	0.695	0.805	3	1.875	0.91	0.81	0.49	0.016	0.144	0.188	0.6	0.6	1.5	0.75	2	2
100-300-12-026	0.75	0.695	0.805	2	1	0.91	0.81	0.49	0.029	0.156	0.188	0.14	0.141	0.625		2	2
100-300-12-027	0.75	0.695	0.805	3	1.25	0.91	0.81	0.49	0.016	0.098	0.188	0.29	0.29	0.875	0.437	2	2
100-300-12-028	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.028	0.144	0.375			0.5		0	1
100-300-12-029	0.75	0.695	0.805	1	0.438	0.91	0.81	0.49	0.02	0.128	0.219					0	1
100-300-12-030	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.098	0.25	0.22	0.22	0.75		2	2
100-300-12-031	0.75	0.695	0.805	1	0.625	0.91	0.81	0.49	0.016	0.128	0.25	0.18	0.18			2	2
100-300-12-032	0.75	0.695	0.805	2	1	0.91	0.81	0.49	0.016	0.136	0.25			0.5		0	1
100-300-12-033	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.128	0.125	0.225	0.225	1		4	2
100-300-12-034	0.75	0.695	0.805	3	1.625	0.91	0.81	0.49	0.029	0.144	0.25			1.125	0.562	0	1
100-300-12-081	0.75	0.695	0.805	2	0.75	0.91	0.81	0.49	0.02	0.103	0.187			0.375		0	1
100-300-12-082	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.144	0.25			0.75		7	2
100-300-12-083	0.75	0.695	0.805	2	0.75	0.91	0.81	0.49	0.028	0.166	0.19			0.375		0	1
100-300-12-084	0.75	0.695	0.805	1	0.375	0.91	0.81	0.49	0.02	0.144	0.188					0	1
100-300-12-085	0.75	0.695	0.805	2	1	0.91	0.81	0.49	0.016	0.144	0.25			0.5		0	1
100-300-12-086	0.75	0.695	0.805	2	1	0.91	0.81	0.49	0.016	0.144	0.25	0.48		0.5		1	2
100-300-12-087	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.128	0.25			0.75		0	1
100-300-12-088	0.75	0.695	0.805	2	0.75	0.91	0.81	0.49	0.028	0.166	0.19			0.375		0	1
100-300-12-089	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.128	0.312			0.625		0	1
100-300-12-090	0.75	0.695	0.805	2	1.375	0.91	0.81	0.49	0.016	0.103	0.313			0.75		0	1
100-300-12-091	0.75	0.695	0.805	2	1	0.91	0.81	0.49	0.02	0.128	0.187			0.625		0	1
100-300-12-092	0.75	0.695	0.805	2	1.5	0.91	0.81	0.49	0.016	0.144	0.375			0.75		2	2
100-300-12-093	0.75	0.695	0.805	3	1.25	0.91	0.81	0.49	0.025	0.144				0.75	0.375	0	1
100-300-12-094	0.75	0.695	0.805	2	1.25	0.91	0.81	0.49	0.016	0.128				0.75		4	2
100-300-12-095	0.75	0.695	0.805	3	1.25	0.91	0.81	0.49	0.032	0.144				0.75	0.375	0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.




## Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

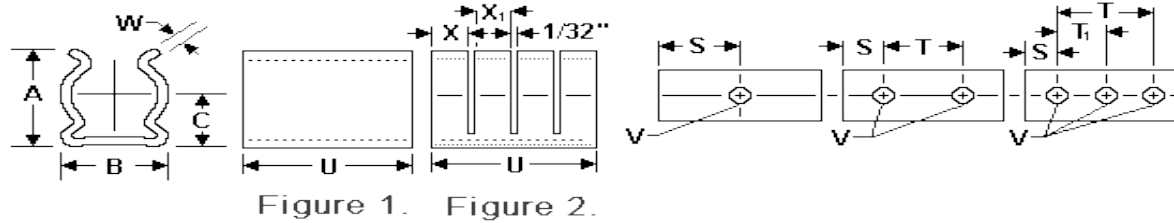

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-12-096	0.75	0.695	0.805	3	1.25	0.91	0.81	0.49	0.016	0.144				0.75	0.375	0	1
100-300-12-097	0.75	0.695	0.805	3	2	0.91	0.81	0.49	0.016	0.128	0.25	0.47	0.47	1.5	0.75	3	2
100-300-12-098	0.75	0.695	0.805	2	1	0.91	0.81	0.49	0.029	0.156	0.187			0.625		0	1
100-300-12-099	0.75	0.695	0.805	2	0.75	0.91	0.81	0.49	0.02	0.128	0.187			0.375		0	1

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.




## Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: [www.atlee.com/wp-content/uploads/docs/finishes.pdf](http://www.atlee.com/wp-content/uploads/docs/finishes.pdf)

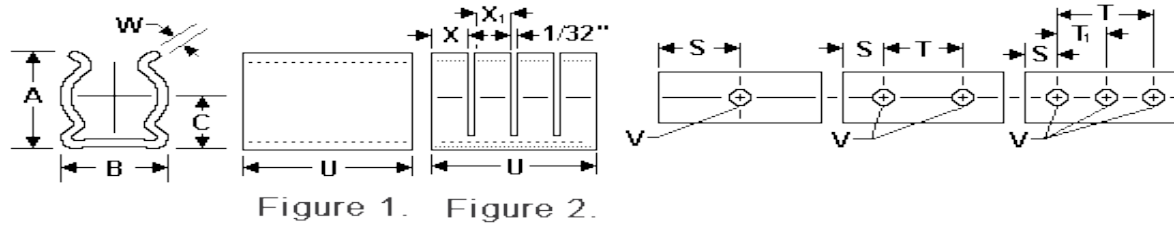

**Note:** All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.