



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

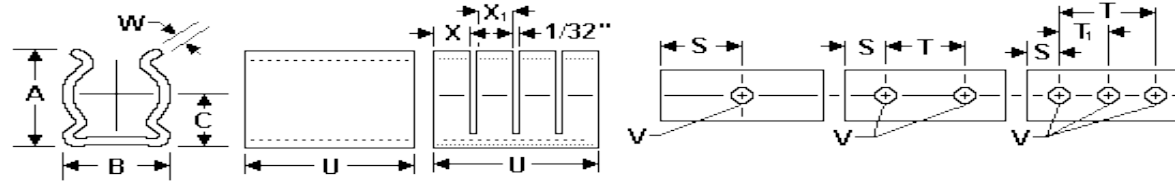


Figure 1. Figure 2.

.375 Diameter Spring Clips - Beryllium Copper

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-14-000	0.375	0.34	0.395	3	1.188	0.46	0.4	0.26	0.012	0.093	0.188	0.38	0.38	0.813	0.406	2	2
100-300-14-001	0.375	0.34	0.395	2	0.781	0.46	0.4	0.26	0.012	0.093	0.188	0.38		0.406		1	2
100-300-14-002	0.375	0.34	0.395	1	0.375	0.46	0.4	0.26	0.012	0.093	0.188					0	1
100-300-14-003	0.375	0.34	0.395	2	0.781	0.46	0.4	0.26	0.012	0.103	0.188			0.406		0	1
100-300-14-004	0.375	0.34	0.395	2	0.953	0.46	0.39	0.26	0.008	0.078	0.188			0.578		0	1
100-300-14-005	0.375	0.34	0.395	3	1.125	0.46	0.4	0.26	0.012	0.098	0.188	0.34	0.38	0.75	0.375	2	2
100-300-14-006	0.375	0.34	0.395	2	0.953	0.46	0.4	0.26	0.012	0.093	0.188			0.578		0	1
100-300-14-007	0.375	0.34	0.395	3	1.188	0.46	0.4	0.26	0.012	0.103	0.188	0.38	0.38	0.813	0.406	2	2
100-300-14-008	0.375	0.34	0.395	2	0.953	0.46	0.39	0.26	0.008	0.078	0.188	0.3	0.3	0.578		2	2
100-300-14-009	0.375	0.34	0.395	3	1.125	0.46	0.4	0.25	0.01	0.103	0.188	0.55		0.75	0.375	1	2
100-300-14-010	0.375	0.34	0.395	2	0.781	0.46	0.4	0.26	0.01	0.093	0.188	0.24	0.24	0.406		2	2
100-300-14-011	0.375	0.34	0.395	2	0.953	0.46	0.4	0.25	0.008	0.093	0.188			0.578		0	1
100-300-14-012	0.375	0.34	0.395	2	0.953	0.46	0.4	0.26	0.01	0.103	0.188			0.578		0	1
100-300-14-013	0.375	0.34	0.395	3	1.188	0.46	0.4	0.26	0.012	0.093	0.188			0.813	0.406	0	1
100-300-14-014	0.375	0.34	0.395	2	0.719	0.46	0.4	0.26	0.012	0.067	0.156	0.34		0.406		1	2
100-300-14-015	0.375	0.34	0.395	1	0.5	0.46	0.4	0.26	0.012	0.103	0.25					0	1
100-300-14-016	0.375	0.34	0.395	2	0.75	0.46	0.4	0.25	0.01	0.103	0.188			0.375		0	1
100-300-14-017	0.375	0.34	0.395	2	2	0.46	0.4	0.26	0.012	0.103	0.188			1.625		0	1
100-300-14-018	0.375	0.34	0.395	2	1.125	0.46	0.4	0.26	0.012	0.115	0.312	0.134	0.134	0.5		6	2
100-300-14-019	0.375	0.34	0.395	1	0.375	0.46	0.4	0.25	0.01	0.07	0.188					0	1
100-300-14-020	0.375	0.34	0.395	2	0.719	0.46	0.4	0.26	0.012	0.067	0.156	0.22	0.22	0.406		2	2
100-300-14-021	0.375	0.34	0.395	0	1	0.46	0.4	0.25	0.01			0.31	0.31			2	2
100-300-14-022	0.375	0.34	0.395	0	1.125	0.46	0.4	0.25	0.01			0.35	0.35			2	2
100-300-14-023	0.375	0.34	0.395	0	1.25	0.46	0.4	0.25	0.01			0.39	0.39			2	2
100-300-14-024	0.375	0.34	0.395	0	0.953	0.46	0.4	0.25	0.01			0.3	0.3			2	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

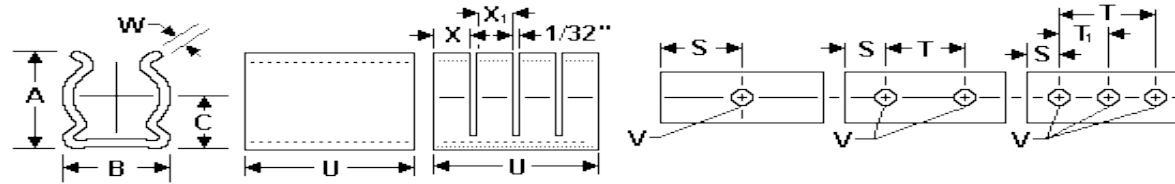


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-14-025	0.375	0.34	0.395	3	2	0.46	0.4	0.25	0.01	0.103	0.25			1.5	0.75	0	1
100-300-14-026	0.375	0.34	0.395	1	0.375	0.46	0.41	0.26	0.018	0.093	0.188					0	1
100-300-14-027	0.375	0.34	0.395	2	0.719	0.46	0.4	0.25	0.01	0.073	0.156	0.34		0.406		1	2
100-300-14-028	0.375	0.34	0.395	1	0.375	0.46	0.4	0.26	0.012	0.103	0.188					0	1
100-300-14-029	0.375	0.34	0.395	1	0.625	0.46	0.4	0.26	0.012	0.043	0.125			0.375		0	1
100-300-14-095	0.375	0.34	0.395	2	0.953	0.46	0.4	0.25	0.01	0.076				0.578		1	2
100-300-14-096	0.375	0.34	0.395	2	0.953	0.46	0.4	0.25	0.01	0.093				0.437		1	2
100-300-14-097	0.375	0.34	0.395	1	0.375	0.46	0.4	0.26	0.012	0.076	0.188					0	1
100-300-14-098	0.375	0.34	0.395	2	0.781	0.46	0.4	0.26	0.012	0.103	0.188	0.23	0.23	0.406		2	2
100-300-14-099	0.375	0.34	0.395	2	0.781	0.46	0.4	0.26	0.012	0.093	0.188	0.23	0.23	0.406		2	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.