



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf




Figure 1. Figure 2.

.400 Diameter Spring Clips - Beryllium Copper

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-16-000	0.4	0.37	0.42	3	1.188	0.49	0.42	0.28	0.012	0.093	0.188	0.38	0.38	0.813	0.406	2	2
100-300-16-001	0.4	0.37	0.42	2	0.781	0.49	0.42	0.28	0.012	0.093	0.188	0.38		0.406		1	2
100-300-16-002	0.4	0.37	0.42	1	0.375	0.49	0.42	0.28	0.012	0.093	0.188					0	1
100-300-16-003	0.4	0.37	0.42	2	0.953	0.49	0.42	0.28	0.012	0.078	0.188			0.578		0	1
100-300-16-004	0.4	0.37	0.42	2	0.953	0.49	0.42	0.28	0.012	0.093	0.188			0.578		0	1
100-300-16-005	0.4	0.37	0.42	2	0.625	0.49	0.42	0.28	0.012	0.103	0.156			0.312		0	1
100-300-16-006	0.4	0.37	0.42	2	0.781	0.49	0.42	0.28	0.012	0.103	0.188			0.406		0	1
100-300-16-007	0.4	0.37	0.42	2	0.75	0.49	0.42	0.28	0.012	0.099	0.172	0.36		0.406		1	2
100-300-16-008	0.4	0.37	0.42	3	1.188	0.49	0.42	0.28	0.012	0.103	0.188			0.813	0.406	0	1
100-300-16-009	0.4	0.37	0.42	2	0.75	0.49	0.42	0.28	0.012	0.093	0.156			0.437		0	1
100-300-16-010	0.4	0.37	0.42	3	1.188	0.49	0.42	0.28	0.016	0.103	0.188	0.38	0.38	0.813	0.406	2	2
100-300-16-011	0.4	0.37	0.42	2	0.875	0.49	0.42	0.28	0.01	0.062	0.237	0.276	0.261	0.4		2	2
100-300-16-012	0.4	0.37	0.42	2	0.875	0.49	0.42	0.28	0.01	0.093	0.188			0.5		0	1
100-300-16-013	0.4	0.37	0.52	3	1	0.49	0.42	0.28	0.012	0.093	0.094	0.28	0.38	0.813	0.406	2	2
100-300-16-014	0.4	0.37	0.42	2	0.875	0.49	0.42	0.28	0.012	0.093	0.188	0.22	0.38	0.5		2	2
100-300-16-015	0.4	0.37	0.42	2	0.953	0.49	0.42	0.28	0.01	0.078	0.188	0.135	0.13	0.578		5	2
100-300-16-016	0.4	0.37	0.42	2	1	0.49	0.42	0.28	0.012	0.065	0.313	0.11	0.11	0.375		6	2
100-300-16-017	0.4	0.37	0.42	2	0.75	0.49	0.42	0.28	0.012	0.103	0.188			0.375		0	1
100-300-16-018	0.4	0.37	0.42	2	0.5	0.49	0.42	0.28	0.012	0.093	0.156			0.375		0	1
100-300-16-019	0.4	0.37	0.42	2	0.875	0.49	0.42	0.28	0.012	0.093	0.188			0.5		0	1
100-300-16-020	0.4	0.37	0.42	2	0.625	0.49	0.42	0.28	0.012	0.093	0.156			0.312		0	1
100-300-16-021	0.4	0.37	0.42	2	0.375	0.49	0.42	0.28	0.012	0.093	0.094			0.187		0	1
100-300-16-022	0.4	0.37	0.42	2	1	0.49	0.42	0.28	0.01	0.093	0.375			0.25		0	1
100-300-16-023	0.4	0.37	0.42	2	1	0.49	0.42	0.28	0.01	0.093	0.375	0.485		0.25		1	2
100-300-16-024	0.4	0.37	0.42	2	1	0.49	0.42	0.28	0.01	0.104	0.375	0.48		0.25		1	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

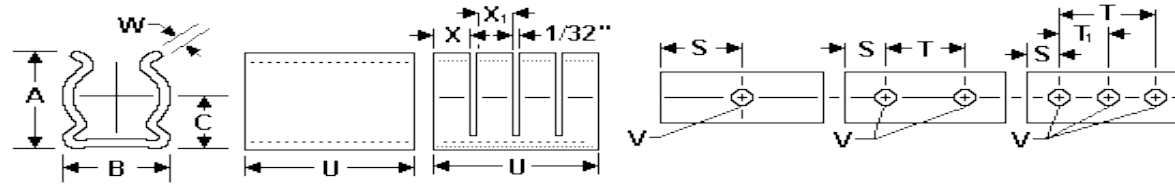


Figure 1. Figure 2.

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-16-025	0.4	0.37	0.42	3	1	0.49	0.42	0.28	0.01	0.093	0.093			0.812	0.406	0	1
100-300-16-096	0.4	0.37	0.42	2	0.75	0.49	0.42	0.28	0.012	0.067	0.093	0.23	0.23	0.562		2	2
100-300-16-097	0.4	0.37	0.42	2	0.953	0.49	0.42	0.28	0.012	0.115	0.23	0.14	0.13	0.5		5	2
100-300-16-098	0.4	0.37	0.42	2	0.781	0.49	0.42	0.28	0.012	0.115	0.203	0.13	0.13	0.375		4	2
100-300-16-099	0.4	0.37	0.42	3	1	0.49	0.42	0.28	0.012	0.093	0.094	0.28	0.38	0.813	0.406	2	2

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.