



Spring Clips

Material: # 172 Beryllium Copper ASTM B194

Standard Plating: Cadmium-Yellow Chromate AMS QQ-P-416 CLASS 2 TYPE II

Other Finishes Available: www.atlee.com/wp-content/uploads/docs/finishes.pdf

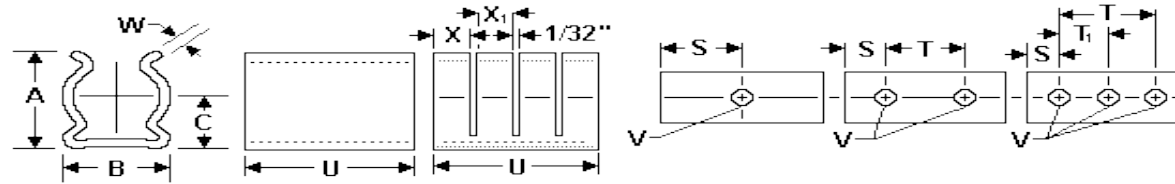


Figure 1. Figure 2.

.343 Diameter Spring Clips - Beryllium Copper

Part #	Nom Dia	Min Dia	Max Dia	Holes	U +/- .010	A +/- .020	B +/- .010	C +/- .020	W +/- .003	V +/- .003	S +/- .010	X +/- .020	X +/- .020	T +/- .005	T1 +/- .005	Slots	Figure
100-300-05A-000	0.343	0.313	0.363	2	0.625	0.44	0.38	0.24	0.016	0.093	0.125			0.375		0	1
100-300-05A-001	0.343	0.313	0.363	1	0.188	0.44	0.38	0.24	0.012	0.093	0.094					0	1
100-300-05A-002	0.343	0.313	0.363	2	0.625	0.44	0.38	0.24	0.012	0.093	0.125			0.375		0	1
100-300-05A-003	0.343	0.313	0.363	2	0.625	0.44	0.38	0.24	0.016	0.093	0.125	0.125	0.31	0.375		2	2
100-300-05A-004	0.343	0.313	0.363	1	0.219	0.44	0.38	0.24	0.012	0.093	0.109					0	1
100-300-05A-005	0.343	0.313	0.363	1	0.375	0.44	0.38	0.24	0.01	0.093	0.188					0	1
100-300-05A-006	0.343	0.313	0.363	2	0.75	0.44	0.38	0.24	0.01	0.093	0.156			0.437		0	1
100-300-05A-007	0.343	0.313	0.363	2	0.6	0.44	0.38	0.24	0.016	0.103	0.15			0.3		0	1
100-300-05A-008	0.343	0.313	0.363	2	1	0.44	0.38	0.24	0.012	0.093	0.25			0.5		0	1
100-300-05A-009	0.343	0.313	0.363	2	0.625	0.44	0.38	0.24	0.012	0.093	0.156			0.312		0	1
100-300-05A-010	0.343	0.313	0.363	2	0.625	0.44	0.38	0.24	0.016	0.103	0.125			0.375		0	1
100-300-05A-099	0.343	0.313	0.363	2	0.563	0.44	0.38	0.24	0.012	0.093	0.125			0.312		0	1

Note: All dimensions are with clip secured to flat surface as normally mounted with component of nominal diameter in place.